



Resources, Tools and Basic Information for Engineering and Design of Technical Applications!

Thermal Conductivity of some common Materials

Thermal conductivity of some common materials as aluminum, asphalt, brass, copper and many more

Thermal Conductivity

Contract testing & Instrument Sales Solids, liquids & Powders
www.Thermal-Conductivity.com

Pipe Insulation

Five Great Sites About Pipe Insulation
5greatest.com

Ridgid Foam Insulation

Bargain Prices. Smart Deals. Shop for Ridgid Products!
Shopzilla.com

External Wall Insulation

How, why and where to insulate
CD or CD ROM version
www.externalwallinsulation.com

Ads by Goooooogle

Thermal conductivity is the quantity of heat transmitted through a unit thickness in a direction normal to a surface due to a unit temperature gradient under steady state conditions.

Thermal conductivity, or heat transfer coefficients, of some common materials and products can be found in the table below.

Thermal Conductivity - k - (W/m K)			
Material/Substance	Temperature (°C)		
	25	125	225
Acetone	0.16		
Acrylic	0.2		
Air	0.024		
Alcohol	0.17		
Aluminum	250	255	250
Aluminum Oxide	30		
Ammonia	0.022		
Antimony	18.5		
Argon	0.016		
Asbestos-cement board	0.744		
Asbestos-cement sheets	0.166		
Asbestos-cement	2.07		
Asbestos, loosely packed	0.15		
Asphalt	0.75		
Balsa	0.048		
Bitumen	0.17		
Benzene	0.16		
Beryllium	218		
Brass	109		
Brick dense	1.31		
Brick work	0.69		
Cadmium	92		
Carbon	1.7		
Cement, portland	0.29		
Cement, mortar	1.73		
Cobalt	69		
Concrete	0.9 - 2		


Constantan	22		
Copper	401	400	398
Corian (ceramic filled)	1.06		
Corkboard	0.043		
Cork, regranulated	0.044		
Cork, ground	0.043		
Cotton	0.03		
Carbon Steel	54	51	47
Cotton Wool insulation	0.029		
Diatomaceous earth (Sil-o-cel)	0.06		
Ether	0.14		
Epoxy	0.35		
Felt insulation	0.04		
Fiberglass	0.04		
Fiber insulating board	0.048		
Fireclay brick 500°C	1.04		
Foam Glass	0.045		
Gasoline	0.15		
Glass	1.05		
Glass Pearls, dry	0.18		
Glass Pearls, saturated	0.76		
Glass Wool Insulation	0.04		
Glycerol	0.28		
Gold	310	312	310
Granite	1.7 - 4.0		
Gypsum or plaster board	0.17		
Hardboard high density	0.15		
Hardwoods (oak, maple..)	0.16		
Helium	0.142		
Hydrogen	0.168		
Ice	2.18		
Insulation materials	0.035 - 0.16		
Iridium	147		
Iron	80	68	60
Iron, wrought	59		
Iron, cast	55		
Kapok insulation	0.034		
Kerosene	0.15		
Lead Pb	35		
Leather	0.14		
Limestone	1.26 - 1.33		
Magnesia insulation	0.07		
Magnesium	156		
Marble	3		
Mercury	8		
Methane	0.030		

Methanol	0.21		
Mica	0.75		
Molybdenum	138		
Monel	26		
Nickel	91		
Nitrogen	0.024		
Nylon 6	0.25		
Oil, machine	0.15		
Olive oil	0.17		
Oxygen	0.024		
Paper	0.05		
Paraffin Wax	0.25		
Plaster, gypsum	0.48		
Plaster, metal lath	0.47		
Plaster, wood lath	0.28		
Platinum	70	71	72
Plywood	0.13		
Polyethylene HD	0.42 - 0.51		
Polypropylene	0.1 - 0.22		
Polystyrene expanded	0.03		
Porcelain	1.05		
PTFE	0.25		
PVC	0.19		
Pyrex glass	1.005		
Quartz mineral	3		
Rock Wool insulation	0.045		
Sand, dry	0.35		
Sand, saturated	2.7		
Saw Dust	0.06		
Silicone oil	0.1		
Silver	429		
Snow (temp < 0°C)	0.05 - 0.25		
Sodium	84		
Softwoods (fir, pine ..)	0.12		
Steel	46		
Stainless Steel	16	17	19
Straw insulation	0.09		
Styrofoam	0.033		
Tin Sn	67		
Zinc Zn	116		
Vinyl ester	0.25		
Water	0.58		
Water, vapor (steam)		0.016	
Wood across the grain, white pine	0.12		
Wood across the grain, balsa	0.055		
Wood across the grain, yellow pine	0.147		

Wool felt

0.04

- $1 \text{ W/(m.K)} = 1 \text{ W/(m}^\circ\text{.C)} = 0.85984 \text{ kcal/(h.m.}^\circ\text{C)} = 0.5779 \text{ Btu/(ft.h.}^\circ\text{F)}$
- What is conductive heat transfer?

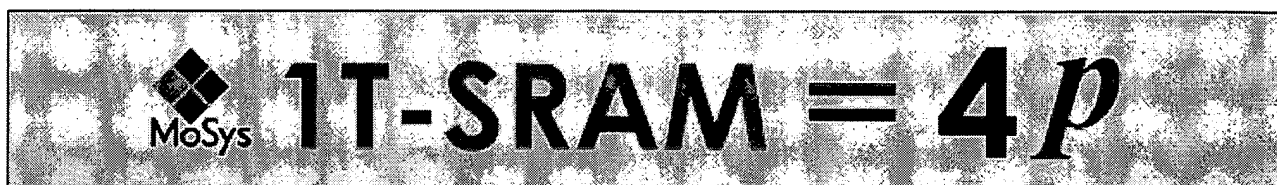

Related Topics

- Insulation Heat transfer and heat loss from buildings and technical applications. Insulation methods and coefficients reduce energy consumption.
- Material Properties Material properties as densities, heat capacities for gases, fluids and solids
- Thermodynamics Thermodynamics studies the effects of changes in temperature, pressure, and volume on p at the macroscopic scale by analyzing the collective motion of their particles.

Related Documents

- Conductive Heat Transfer Heat transfer will take place as conduction when there exists a temperature gradient in a fluid
- Overall Heat Transfer Coefficient Calculating the overall heat transfer coefficient in walls or heat exchangers
- Mineral Wool Insulation Thermal conductivity - Temperature and k-values
- Thermal Conductivity of Metals Thermal conductivity of some common metals
- Insulation Materials and Temperature Ranges Temperature limits of some common insulation materials
- Resistivity from Conductivity Thermal resistivity and conductivity
- Thermal Transmittance - U Thermal transmittance - U - from thermal resistance
- Calcium Silicate Insulation Thermal conductivity - temperature and k-values



ToolBox ShortList

Difficult to find your favorite ToolBox page? **Add links to your favorite pages in your own personal Shortlist!**

- Add a link to This page Here!

• Add this Page! • Delete the ShortList!

Search the ToolBox

Google™

Search

☐ Web ☒ The Engineering ToolBox

Translate the ToolBox

- Home
- Acoustics
- Air Psychrometrics
- Basics
- Combustion
- Electrical
- Environment
- Fluid Mechanics
- Gas and Compressed Air
- HVAC Systems
- Insulation
- Material Properties
- Mechanics
- Miscellaneous
- Physiology
- Piping Systems
- Process Control
- Pumps
- Standards Organizations
- Steam and Condensate
- Thermodynamics
- Water Systems



Translate this page to [Spanish](#) [French](#) [German](#) [Italian](#) [Dutch](#) [Norwegian](#)

About Us

We appreciate any comments and tips on how to make The Engineering ToolBox a better information source. Please contact us by email

thorfof@yahoo.com

If You find any faults, inaccurate, or otherwise unacceptable information.

The content in The Engineering ToolBox is copyrighted but can be used with **NO WARRANTY or LIABILITY**. Important information should always be double checked with alternative sources. All applicable national and local regulations and practices concerning this aspects must be strictly followed and adhered to.

© The Engineering ToolBox 2005

7 3 23

Ads by Google

[Heat Conductive](#)

[Heat Dissipative](#)

[Aluminum Filled](#)

[Aluminum Molding](#)

[Copper Additive](#)

[ToolBox ShortList!](#)

• [Add this Page!](#)

• [BookMark the ToolBox!](#)

• [BookMark this Page!](#)

• [Link to this Page!](#)

• [Post this page to del.icio.us](#)

Google™

• [Search this Site!](#)

• [Translate this Page!](#)

• [About Us!](#)

Temperature

0

☒ °C

☐ °F

Convert!

Length

1

☒ m

☐ km

☐ in

☐ ft

☐ yards

☐ miles



Printerfriendly

[ToolBox ShortList!](#)

• [Add this Page!](#)

• [BookMark the ToolBox!](#)

• [BookMark this Page!](#)

• [Link to this Page!](#)

• [Post this page to del.icio.us](#)

Appliance



Desktop Engineering



Industry standards
online:

ASM, ASME, IEEE,
ISO, API

TECHSTREET™

☐ nautical miles

Convert !

Volume

1

☒ m^3

☐ liters

☐ in^3

☐ ft^3

☐ us gal

Convert !

Velocity

1

☒ m/s

☐ km/h

☐ ft/min

☐ ft/s

☐ mph

☐ knots

Convert !

Pressure

1

☒ Pa (N/m^2)

☐ bar

☐ mm H_2O

☐ kg/cm^2

☐ psi

☐ inches H_2O

Convert !

Flow

1

☒ m^3/s

☐ m^3/h

☐ US gpm


☐ cfm


Convert !

Unit Converter



STANDARD PRODUCTS	CUSTOM PRODUCTS AND SERVICES	CASE STUDIES	MATERIALS	DESIGN NOTES	WORKING TOGETHER	COMPANY
-------------------	---------------------------------	--------------	-----------	--------------	------------------	---------



CALL US RIGHT NOW
908-213-7070
Or email Accuratus 

Materials

Boron Nitride, BN

Accuflect

Aluminum Nitride

Aluminum Oxide

Boron Nitride

Fused Silica

Macor

Mullite

Sialon

Silicon Carbide

Silicon Nitride

Zirconium Oxide

Boron nitride is a white solid material in the as produced hot pressed form. It is a porosity solid. It is easily machined into complex shapes using standard carbide tools. The material is anisotropic in its electrical and mechanical properties due to hexagonal crystals and their orientation during the hot press consolidation.

Key Properties

- ✓ High thermal conductivity
- ✓ Low thermal expansion
- ✓ Good thermal shock resistance
- ✓ High electrical resistance
- ✓ Low dielectric constant and loss tangent
- ✓ Microwave transparency
- ✓ Non toxic
- ✓ Easily machined — non abrasive and lubricious
- ✓ Chemically inert
- ✓ Not wet by most molten metals

Typical Uses

- ✓ Electronic parts — heat sinks, substrates, coil forms, prototypes
- ✓ Boron doping wafers in silicon semiconductor processing
- ✓ Vacuum melting crucibles
- ✓ CVD crucibles
- ✓ Microcircuit packaging
- ✓ Sputtering targets
- ✓ High precision sealing, brazing, and metallizing fixtures
- ✓ Microwave tubes
- ✓ Horizontal caster break rings
- ✓ Low friction seals
- ✓ Plasma arc insulators
- ✓ High temperature furnace fixtures and supports

General Information

Boron nitride is often referred to as “white graphite” because it is a lubricious material with the same platy hexagonal structure as carbon graphite. Unlike graphite, BN is an electrical insulator. It offers very high thermal conductivity and good thermal resistance. BN is stable in inert and reducing atmospheres up to 2800°C, and in oxidizing atmospheres to 850°C.

Three grades are commonly used, including a boric oxide binder system, a carbon binder system, and a pure diffusion bonded grade. The boric oxide containing material (Grade BO) absorbs moisture which causes swelling and property degradation. The carbon binder containing material (Grade CA) is moisture resistant. The pure BN material (Grade XP) contains no binders and is used for extremes of temperature and where high strength is important. The boric oxide material is the most commonly used grade.

Engineering Properties***Boron Nitride, Grade BO**

Mechanical	Units of Measure	Orientation to Pressing		
	SI/Metric (Imperial)	Parallel		Perpendicular
Density	gm/cc (lb/ft ³)	1.9	(120)	1.9
Porosity	% (%)	2.8	2.8	2.8
Color	—	white	white	white
Flexural Strength	MPa (lb/in ² x10 ³)	75.8	(11.0)	11
Elastic Modulus	GPa (lb/in ² x10 ⁶)	46.9	(6.8)	73
Shear Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Bulk Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Poisson's Ratio	—	—	—	—
Compressive Strength	MPa (lb/in ² x10 ³)	143	(20.8)	18
Hardness	Kg/mm ²	15-24	—	15-
Fracture Toughness K _{IC}	MPa•m ^{3/2}	—	—	—
Maximum Use Temperature (inert atm)	°C (°F)	1800	(3250)	—
Thermal				
Thermal Conductivity	W/m•°K (BTU•in/ft ² •hr•°F)	30	(205)	30
Coefficient of Thermal Expansion	10 ⁻⁶ /°C (10 ⁻⁶ /°F)	11.9	(6.6)	3.0
Specific Heat	J/Kg•°K (Btu/lb•°F)	1610	(.38)	—
Electrical				
Dielectric Strength	ac-kv/mm (volts/mil)	95	(2400)	75
Dielectric Constant	@ 8.8 GHz	4.6	—	4.6

Dissipation Factor	@ 8.8 GHz	0.0017	—	0.00
Loss Tangent	—	—	—	—
Volume Resistivity	ohm•cm	>10 ¹⁴	—	>10 ¹⁴

Boron Nitride, Grade CA

Mechanical	Units of Measure	Orientation to Pressing		
	SI/Metric (Imperial)	Parallel	Perpendicular	Perpendicular
Density	gm/cc (lb/ft ³)	1.9	(120)	1.9
Porosity	% (%)	15	15	15
Color	—	white	—	white
Flexural Strength	MPa (lb/in ² x10 ³)	43.4	(6.3)	61
Elastic Modulus	GPa (lb/in ² x10 ⁶)	33.8	(4.9)	71
Shear Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Bulk Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Poisson's Ratio	—	—	—	—
Compressive Strength	MPa (lb/in ² x10 ³)	30	(4.4)	44
Hardness	Kg/mm ²	14-18	—	14-18
Fracture Toughness K _{IC}	MPa•m ^{1/2}	—	—	—
Maximum Use Temperature (inert atm)	°C (°F)	1800	(3200)	—
Thermal				
Thermal Conductivity	W/m•K (BTU•in/ft ² •hr•°F)	27	(187)	31
Coefficient of Thermal Expansion	10 ⁻⁶ /°C (10 ⁻⁶ /°F)	2.95	(1.6)	.8
Specific Heat	J/Kg•°K (Btu/lb•°F)	1470	.35	—
Electrical				
Dielectric Strength	ac-kv/mm (volts/mil)	67	(1700)	—
Dielectric Constant	@ 8.8 GHz	4.3	—	4
Dissipation Factor	@ 8.8 GHz	0.0014	—	0.00
Loss Tangent	—	—	—	—
Volume Resistivity	ohm•cm	>10 ¹⁴	—	>10 ¹⁴

Boron Nitride, Grade XP

Mechanical	Units of Measure	Orientation to Pressing		
	SI/Metric (Imperial)	Parallel	Perpendicular	Perpendicular
Density	gm/cc (lb/ft ³)	1.9	(120)	1.9

Porosity	% (%)	14	14	1.
Color	—	white	white	wh
Flexural Strength	MPa (lb/in ² x10 ³)	13.8	(2)	21
Elastic Modulus	GPa (lb/in ² x10 ⁶)	14	(2)	—
Shear Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Bulk Modulus	GPa (lb/in ² x10 ⁶)	—	—	—
Poisson's Ratio	—	—	—	—
Compressive Strength	MPa (lb/in ² x10 ³)	18	(2.6)	23
Hardness	Kg/mm ²	3-5	—	3-
Fracture Toughness K _{IC}	MPa•m ^{1/2}	—	—	—
Maximum Use Temperature (inert atm)	°C (°F)	3000	(5400)	—
Thermal				
Thermal Conductivity	W/m•°K (BTU•in/ft ² •hr•°F)	71	(490)	12
Coefficient of Thermal Expansion	10 ⁻⁶ /°C (10 ⁻⁶ /°F)	0.6	(.33)	-.4
Specific Heat	J/Kg•°K (Btu/lb•°F)	1470	(.36)	—
Electrical				
Dielectric Strength	ac-kv/mm (volts/mil)	80	(2000)	80
Dielectric Constant	@ 8.8 GHz	4	—	4
Dissipation Factor	@ 8.8 GHz	0.0012	—	0.00
Loss Tangent	—	—	—	—
Volume Resistivity	ohm•cm	>10 ¹⁴	—	>10 ¹⁴

*All properties are room temperature values except as noted.

The data presented is typical of commercially available material and is offered for comparative purposes only. It is not to be interpreted as absolute material properties nor does it constitute a representation or warranty for which we assume any liability. User shall determine suitability of the material for the intended use and assumes all risk and liability with connection therewith.

[Standard Products](#) | [Custom Products and Services](#) | [Case Studies](#) | [Materials](#) | [Design Notes](#) | [Working Together](#) | [Vision](#) | [Contact Us](#) | [Site Map](#)

1-908-213-7070

©2002 Accuratus

Site Design M. Adams